

SE 706 Memosens Oxygen Sensor

Sensor in robust and hygienic stainless steel design, high accuracy and low detection limit, simple and fast maintenance due to special membrane, digital, with Memosens technology.

Reliable in-line measurement of dissolved oxygen, even under sterile and hygienic conditions. High signal stability. Simple maintenance due to modular design.

Special membrane with steel mesh and PTFE coating. Sterilizable, autoclavable and CIP capable. Also suitable for use in hazardous locations.

Applications

Biotechnology, pharmaceutical industry, fermentation, various fields of analytical chemistry

Facts

- perfect galvanic isolation thanks to Memosens technology
- no influence of humidity in the connector
- precalibration in the lab
- digital data transfer
- integrated sensor diagnostics
- high level of process safety
- durable materials
- robust design
- easy to clean thanks to extremely smooth surface
- cost-efficient service due to easy-to-replace membrane module and interior body
- hygienic design
- high resolution of 6 ppb
- operation also in hazardous locations

SE 706 Memosens Oxygen Sensor

Specifications

Range:	pO ₂ < 1200 mbar
Detection limit:	6 ppb
Accuracy:	1 % + 4 ppb
Response time at 25 °C (air → N ₂):	98 % full scale < 90 s
Signal in ambient air:	50 ... 110 nA
Residual signal in O ₂ -free medium:	≤ 0.1 % of signal in ambient air
Flow dependence:	≤ 5 %
Permissible pressure range (measurement):	0.2 ... 6 bar absolute
Mechanical pressure resistance:	max. 12 bar absolute
Permissible temperature range (measurement):	0 ... 80 °C
Temperature range (stability):	-5 ... +135 °C (steam sterilizable/autoclavable)
O-ring material (process-wetted):	silicone (FDA & USP Class VI tested)
Membrane material:	PTFE/silicone/PTFE, FDA compliant (reinforced with steel mesh)
Process-wetted sensor parts:	1.4404 stainless steel (material certificate 3.1B)
Surface roughness:	N 5 (RA < 0.4 µm)
Temperature detector:	NTC 22 kohms
Interior body incl. electrodes:	replaceable (ZU 0567)
Sensor cap:	Memosens
Certificates:	3A, 3.1 (EN 10204)
ATEX Certificate:	II 1/2 GD Ex ia IIC T6/T5/T4/T3
FM Certificate:	IS for Class I, Division 1, Groups A, B, C, D; Class I, Zone 0, AEx/Ex ia IIC T6 ... T4 NIFW for Class I, Division 2, Groups A, B, C, D; Class I, Zone 2, IIC T6 ... T4

Product Line

Sensor

SE 706 X oxygen sensor

Length

120 mm
220 mm

Order No.

SE 706X/1-NMSN
SE 706X/2-NMSN

Cables

Memosens cable

Length

3 m
5 m
10 m
20 m^{*)}

Order No.

CA/MS-003NAA
CA/MS-005NAA
CA/MS-010NAA
CA/MS-020NAA

Memosens-cable, Ex

3 m
5 m
10 m
20 m^{*)}

CA/MS-003XAA
CA/MS-005XAA
CA/MS-010XAA
CA/MS-020XAA

Accessories

O₂ electrolyte

Quantity

25 ml

Order No.

ZU 0565

O₂ membrane module

separate

ZU 0563

O₂ membrane kit

membrane module (4x), O-ring set (1x), 25 ml electrolyte (1x)

ZU 0564

Interior body for SE 706

ZU 0567

O-ring set

Silicone

ZU 0679

MemoSuite

Management software for Memosens sensors

Basic version (calibration)

Advanced version (calibration, diagnostics, documentation)


Order No.

SW-MS1400-B
SW-MS1400-A

^{*)} Greater lengths on request

SE 706 Memosens Oxygen Sensor

Dimension Drawing

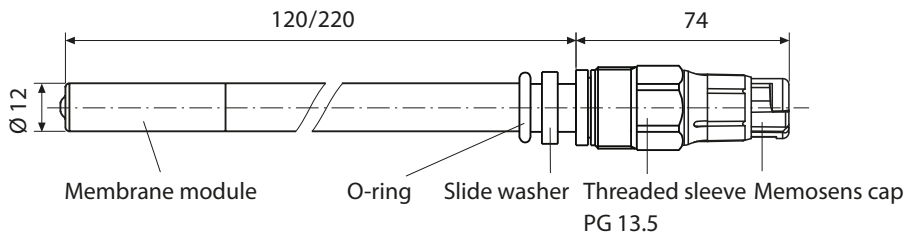

All dimensions in mm